



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|   |           |   |
|---|-----------|---|
| <b>(51) International Patent Classification <sup>7</sup>:</b><br><b>A01M 1/20, A61L 9/22</b>  | <b>A1</b> | <b>(11) International Publication Number:</b> <b>WO 00/38512</b><br><b>(43) International Publication Date:</b> 6 July 2000 (06.07.00)  |
| <b>(21) International Application Number:</b> PCT/GB99/04312<br><b>(22) International Filing Date:</b> 20 December 1999 (20.12.99)<br><b>(30) Priority Data:</b><br>9828728.7      24 December 1998 (24.12.98)      GB<br>9901146.2      19 January 1999 (19.01.99)      GB<br><b>(71) Applicants (for all designated States except US):</b> UNIVERSITY OF SOUTHAMPTON [GB/GB]; Highfield, Southampton SO17 1BJ (GB). RECKITT & COLMAN PRODUCTS LIMITED [GB/GB]; One Burlington Lane, London W4 2RW (GB).<br><b>(72) Inventors; and</b><br><b>(75) Inventors/Applicants (for US only):</b> HUGHES, John, Farrell [GB/GB]; 2 Shepherd's Close, Bartley, Southampton SO40 2JL (GB). HARRISON, Neale, Mark [GB/GB]; 27 Cromwell Close, Tutbury, Burton-on-Trent DE13 9HZ (GB). FOX, Rodney, Thomas [GB/GB]; 30 South Street, Cottingham, Hull HU16 4AS (GB). WHITMORE, Lindsey, Faye [GB/GB]; 60 Tees Farm Road, Colden Common, Winchester SO21 1UQ (GB). KNAPP, Jennifer, Jane [US/GB]; 23 Spring Crescent, Portswood, Southampton SO17 2FZ (GB). |           | <b>(74) Agent:</b> BOULT WADE TENNANT; Verulam Gardens, 70 Gray's Inn Road, London WC1X 8BT (GB).<br><b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).<br><br>Published<br><i>With international search report.</i> |
| <b>(54) Title:</b> METHOD AND APPARATUS FOR DISPERSING A VOLATILE COMPOSITION<br><b>(57) Abstract</b><br><p>A method of dispersing a volatile composition which method comprises dispersing a volatile composition into an air stream; and generating an ion wind, thus causing the molecules of the volatile to become electrically charged. An apparatus for use in the method is also disclosed.</p>   |           |   |

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

|    |                          |    |  |    |  |    |                          |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania                  | ES | Spain                                    | LS | Lesotho                                      | SI | Slovenia                 |
| AM | Armenia                  | FI | Finland                                  | LT | Lithuania                                    | SK | Slovakia                 |
| AT | Austria                  | FR | France                                   | LU | Luxembourg                                   | SN | Senegal                  |
| AU | Australia                | GA | Gabon                                    | LV | Latvia                                       | SZ | Swaziland                |
| AZ | Azerbaijan               | GB | United Kingdom                           | MC | Monaco                                       | TD | Chad                     |
| BA | Bosnia and Herzegovina   | GE | Georgia                                  | MD | Republic of Moldova                          | TG | Togo                     |
| BB | Barbados                 | GH | Ghana                                    | MG | Madagascar                                   | TJ | Tajikistan               |
| BE | Belgium                  | GN | Guinea                                   | MK | The former Yugoslav<br>Republic of Macedonia | TM | Turkmenistan             |
| BF | Burkina Faso             | GR | Greece                                   | ML | Mali   | TR | Turkey                   |
| BG | Bulgaria                 | HU | Hungary                                  | MN | Mongolia                                     | TT | Trinidad and Tobago      |
| BJ | Benin                    | IE | Ireland                                  | MR | Mauritania                                   | UA | Ukraine                  |
| BR | Brazil                   | IL | Israel                                   | MW | Malawi                                       | UG | Uganda                   |
| BY | Belarus                  | IS | Iceland                                  | MX | Mexico                                       | US | United States of America |
| CA | Canada                   | IT | Italy                                    | NE | Niger  | UZ | Uzbekistan               |
| CF | Central African Republic | JP | Japan                                    | NL | Netherlands                                  | VN | Viet Nam                 |
| CG | Congo                    | KE | Kenya                                    | NO | Norway                                       | YU | Yugoslavia               |
| CH | Switzerland              | KG | Kyrgyzstan                               | NZ | New Zealand                                  | ZW | Zimbabwe                 |
| CI | Côte d'Ivoire            | KP | Democratic People's<br>Republic of Korea | PL | Poland                                       |    |                          |
| CM | Cameroon                 | KR | Republic of Korea                        | PT | Portugal                                     |    |                          |
| CN | China                    | KZ | Kazakhstan                               | RO | Romania                                      |    |                          |
| CU | Cuba                     | LC | Saint Lucia                              | RU | Russian Federation                           |    |                          |
| CZ | Czech Republic           | LI | Liechtenstein                            | SD | Sudan  |    |                          |
| DE | Germany                  | LK | Sri Lanka                                | SE | Sweden                                       |    |                          |
| DK | Denmark                  | LR | Liberia                                  | SG | Singapore                                    |    |                          |
| EE | Estonia                  |    |  |    |  |    |                          |

- 1 -

METHOD AND APPARATUS FOR DISPERSING  
A VOLATILE COMPOSITION

5       The present invention relates to a method and  
apparatus for dispersing a volatile composition into  
the air and, in particular, to a method and apparatus  
which relies upon an ion wind to facilitate the  
dispersal into the air of one or more volatile  
compounds from a source of a volatile composition.

10       Compositions which are frequently dispersed into  
the air include insect repellents, insecticides and  
air freshening or room fragrancing compositions.

Chemical insect repellents are known in the art  
and are widely used. For example, N,N-diethyl-m-  
15       toluamide (DEET) is widely used as an insect repellent  
for use on clothing and the skin to repel insects  
which bite, such as mosquitoes. Citronella oil and  
eucalyptus oil are also used for the same purpose.  
However, the application of such chemicals has  
20       disadvantages in that they need to be frequently  
reapplied and they can produce allergic responses in  
some people.

Pesticides, such as synthetic pyrethroids also  
have a repellent and/or insecticidal action and can be  
25       used to treat clothing, mosquito nets etc.. However,  
prolonged or frequent exposure to synthetic  
insecticides may be hazardous to health.

Alternatively, insects can be excluded from  
contact with human beings by providing physical  
30       barriers, such as netting or fly screens, over windows  
and doors, or mosquito netting around beds. The  
disadvantage of such physical barriers is that the  
entry of air is severely restricted when the barriers  
are in place because of the small mesh size required  
35       to exclude the insects. This leads to discomfort in  
hot climates.

- 2 -

Another alternative for use in enclosed spaces, particularly for use overnight, is to burn an insect coil for example containing an insecticidal composition containing a pyrethroid active agent which may also have a repellent effect. Alternatively, an electrical device may be used in which insecticidal tablets containing an insecticidal composition such as a pyrethroid active agent which may also have a repellent effect are heated electrically so that the insecticide/repellent evaporates into the air space and repels and/or kills insects, in particular mosquitoes.

Ultrasound devices have also been sold for repelling mosquitoes, but their efficacy has not been scientifically proven.

Various methods are known for the dispersion of fragrance compositions, such as air fresheners, into a space. For example, an aerosol device may be used to dispense an aerosol spray of the fragrance composition. A disadvantage of such devices is that the fragrance generally only has an effect within the direction of the line of spray and does not last for very long. Other methods of delivering fragrance composition into a space include:-

- (a) natural evaporation of a liquid fragrance composition delivered to, and exposed to, the atmosphere by means of a porous wick;
- (b) natural evaporation and decomposition of a solid gel which includes the fragrance composition; and
- (c) enhanced evaporation of a liquid fragrance composition by local heating of a wick delivery system.

In general, these methods simply distribute a fragrance within an enclosed environment, the sole purpose being to create a perfumed atmosphere.

Ion winds are known in the art and an ion wind is

- 3 -

generated as a direct result of the interaction between negatively or positively charged ions and air molecules. Ion winds are described and explained in "Electrostatics: Principles, Problems and Applications", J.A. Cross, 1987, Adam Hilger, pp 278-284.

Ion winds may be generated using an electrode arrangement in which a first electrode has one or more sharp points and a second electrode acts as an opposing electrode. If the electric field at the tip of the sharp point or points of the first electrode exceeds the breakdown field of air (approximately 30kV/cm) then electrical breakdown of the air will occur for either an ac or dc potential applied to the electrode. This phenomenon is generally termed "corona discharge".

For a dc potential, ions which are of opposite polarity to that of the first electrode will be attracted to the first electrode and collected. Ions of the same polarity to that of the first electrode will be repelled by it, and will be attracted towards the second electrode. The ions are of approximately the same size as neutral air molecules and since the ions which are attracted to the second electrode are under the influence of an electrical field (E), a force of  $F = qE$  will be exerted on them which causes the air molecules to move. As the ions move, they collide with neutral air molecules and momentum sharing occurs. This in turn imparts a force on the neutral air molecules thus inducing movement in the same direction. This is known as the "ion-drag" effect and is the mechanism which leads to the bulk movement of air, otherwise termed an "ion wind". Unidirectional airflow will be induced in this way both for +ve and -ve dc potentials.

In an alternating field (ac) ionisation will still occur but there will be no net movement of ions

- 4 -

in one direction and thus no ion wind generation.

GB-A-2060076 describes an apparatus in which both positive and negative ionic species are generated using a plasma which is generated using radio-frequency methods.

W092/15339 describes an apparatus in which an electrostatic charge is applied to a wick system. This results in the formation of a "Taylor" cone at the extremity of the fibres of the wick which causes atomisation of the liquid from the wick.

SU-A-1803679 describes the use of an electrically driven fan to blow ionized air over a pina tree in order to disperse vapours from the tree into the air.

None of the prior art devices results in a unidirectional induced airflow arising from momentum transfer and hence there is no ion wind produced in the prior art for product dispersion.

We have now developed a method and apparatus using an ion wind whereby a volatile composition may be more effectively distributed throughout a particular space.

Accordingly, in a first aspect the present invention provides a method of dispersing a volatile composition which method comprises:

dispersing a volatile composition into an air stream; and generating an ion wind, thus causing the molecules of the volatile composition to become electrically charged.

In a second aspect the present invention provides an apparatus for dispersing a volatile composition into the atmosphere, which apparatus comprises:

a housing of an electrically insulating material which is in communication with the atmosphere outside the housing, the housing containing:

(i) a source of a volatile composition; and

- 5 -

(ii) means for generating an ion wind to facilitate dispersal of the source of the volatile composition into the atmosphere and to cause the molecules of the volatile composition to become charged.

The present invention uses an ion wind which generates an ionized air flow to facilitate evaporation and dispersal of the volatile composition into the air. A unipolar charge will be transferred to individual molecules of the composition which is evaporated. The composition must be sufficiently volatile, optionally with the assistance of heat, that it can be dispersed into the ion wind air stream. The volatile composition will generally comprise one or more organic molecules. The ion wind not only facilitates the evaporation and dispersal of the volatile composition but also has the added advantages that the ion wind generating device has no moving parts and thus operates at very low noise levels. The ion wind thus acts as an essentially silent fan.

When the composition is vaporized, the unipolar charge will be transferred to any airborne dust particles, allergens, pollen, tobacco particles, microorganisms such as bacteria, viruses and fungal spores, which the vaporized molecules may encounter. Thus, the method of the present invention not only distributes the composition more effectively, but also enhances the removal of airborne particulates. This is because the air ions generated by the ion wind device attach to particles, such as dust particles as a result of collision and electrostatic attraction. The particles thus charged repel each other due to space charge effects, so reaching surfaces more rapidly than uncharged particles. In close proximity to surfaces (particularly grounded surfaces) the charged particles will be attracted to the surface by

- 6 -

image charge attraction. In this way charged particles are precipitated from the air faster than uncharged particles.

5 Preferably, the means for generating the ion wind comprises a first electrode and a second electrode spaced therefrom to define a region there between, such that when an electrical direct current (dc) potential is applied across the first and second electrodes an electric field is created in the said  
10 region.

The second electrode preferably has at least one opening therein through which the interior of the housing communicates with the atmosphere outside the housing.

15 In order to generate an ion wind the first electrode has at least one sharp edge or point, for example needle-points, pin-points or razor blades. The second electrode is preferably a ring electrode, a tubular electrode, a grid electrode or a combination  
20 of one or more thereof. Generally, the second electrode will be earthed.

When the volatile composition is an insect repellent or insecticide, the insect repellent or insecticidal source which is used will comprise a  
25 volatile insect repellent and/or insecticide which is chosen for its repellency and/or toxicity to certain target insect species. For example, insects which it is generally desired to repel include mosquitoes, flies, midges and gnats and in particular those  
30 species of these insects which are known to carry disease.

Naturally occurring or synthetic chemicals or chemical compositions which have a repellent effect on certain species of insects include eucalyptus oil,  
35 geranium oil, geraniol, pine oil, citronella, neem, thyme oil, thymol, camphor, citronelol, citronelal, linalool, carene, myrcene, terpinene, limnolene,



- 7 -

cymene, citronellyl formate, geranyl formate, rose oxide, 2-alkyl-N-acetyloxazolidine, N-acetyl-2-alkyl-4,4-dimethyloxazolidine, dipropyl pyridine-2,5-dicarboxylate, sec-butyl-2-(2-hydroxyethyl)-1-piperidine carboxylate, and methylnaphthalene. Citronella, neem and camphor also have an insecticidal action against some insect species.

Insecticidal compositions, which may also have a repellent action, include pyrethrum and the pyrethroid ester insecticides, including allethrin, bioallethrin, deltamethrin, permethrin and transfluthrin.

The choice of particular repellent or insecticide for use in the present invention will be within the general knowledge of those skilled in this field. Reference may be made to Tomlin C.D.S. (1997) The Pesticide Manual, A World Compendium, BCPC, 11th Edition, 1400pp, or Brown M. & Herbert A.A. (1997) Insect repellents: an overview. J. Am. Acad. Dermatol. 36, 243-249.

The volatile composition may also be an insect sex pheromone for use in mating disruption. For such a use the device could be used in a continuous or pulsed manner. Whilst there are many examples of sex pheromones which are or could be used in mating disruption, certain ones which may be listed in respect of the particular insects whose mating activates are disrupted are:

*Ephestia kühniella* (Mediterranean flour moth) - the sex pheromone is a blend of three components (1 or all may be used):

(Z,E)-9,12-14:Ac

(Z,E)-9,12-14:Alc

(Z)-9-14:Ac

*Lymantria dispar* (Gypsy moth) - the sex pheromone is

Z)-7,8-epoxy-2-methyl octadecanol

*Grapholitha molesta* (Oriental fruit moth) - the

- 8 -

sex pheromone is

main component (Z)-8-dodecenyl

which may be enhanced by addition of:

(Z)-8-dodecenol or dodecanol

- 5 A standard reference text in relation to insect pheromones is Insect Pheromones And Their Use In Pest Management. (1998) Howse PE, Jones OT and IDR Stevens, Chapman Hall.

- 10 Volatile liquids can also be dispersed which have activity in the air or on surfaces. Because the volatile molecules become charged by the ion-wind, they are attracted to surfaces in a room, and coat them. If the volatile liquid has anti-microbial activity micro-organisms on the surfaces can be  
15 counteracted. If the volatile liquid has allergen denaturing properties, allergenic particles on the surfaces can be neutralised.

- If the volatile liquid has anti-microbial activity, collision of the charged volatile molecules  
20 with micro-organisms in the air can result in the counteraction of the micro-organisms.

- If the volatile liquid has allergen denaturing properties collision of the charged volatile molecules with allergenic particles in the air can result in the  
25 neutralisation of the allergen.

When the volatile composition is a fragrance composition, the fragrance source which is used will comprise a volatile composition comprising one or more fragrant components.

- 30 Examples of such fragrance components are diethylphthalate, orange terpenes (limonene), styrallyl acetate ester, Cyclacet, methyl ionone ketone, vanillin, Litsea Cybeba, 2-phenylethan-1-ol, dipropylene glycol and methyl-p-3°-butyl hydrocinnamyl  
35 aldehyde.

The volatile composition is dispersed into the ion wind stream over a period of time. In order to

- 9 -

provide a reasonably constant release of the volatile composition into the ion wind stream the chemicals are generally provided in the form of slow release formulations which may take any desired form. Examples  
5 of suitable slow release formulations include the following devices which are impregnated with the desired chemicals: wick or pads of cotton or a synthetic material fed from a reservoir of the composition, gels, rubber septums or strips,  
10 membranes, polyethylene vials with or without apertures, microcapsules, polymer beads, solid polymer dispensers, hollow fibres, trilaminate ribbons or extruded polymers. Other systems would include pulsed spray systems and heated evaporators.

15 When the volatile composition is provided in the form of a gel, the gel will typically comprise carrageenan, water, a volatile component and an emulsifier. When the volatile composition is provided as a liquid providing a reservoir for a wick or pad in  
20 contact therewith, the liquid will generally comprise volatile component alone, a volatile component and a solvent, a volatile component, a surfactant and water, or a volatile component, surfactant, water and a solvent. It will be understood that mixtures of  
25 volatile components may be used, as desired.

The slow release formulation will be chosen to provide the release of the composition over the desired period of time. For example, when the composition is an insect repellent for the repulsion  
30 of mosquitoes the device should provide a minimum of at least 8 hours release of the repellent, preferably from 10 to 12 hours. However, longer duration formulations are contemplated within the scope of the present invention which could provide release of the  
35 repellent/insecticide over a period of say one week or one month. In such situations the device would include a timer or other activation mechanism to prevent the

- 10 -

chemical being released when it was not required, e.g. during daylight hours.

It will be understood that to obtain the desired level of volatile compounds in a room the nature of the composition, in particular the rate of evaporation of the volatile components of the composition, will need to be carefully selected. Furthermore, the ion wind speed needs to be appropriately selected, higher ion wind speeds providing faster evaporation of the volatile components. In addition, the surface area across which the volatile composition is evaporated is also important in determining the rate of evaporation, i.e. the surface area will need to be adapted to the air flow speed.

The apparatus of the present invention may be constructed as a device which is directly plugged into an electrical mains socket, or as a device with an electrical lead enabling it to be positioned where desired within a room, for example clipped onto a bed headrest or positioned on a bedside table. Because the ion wind has a momentum, the charged ions are less likely to be collected on a wall when the device is plugged into an electrical mains socket. Alternatively, the device may be designed to fit into a light bulb socket, a motor vehicle lighter socket, or may be a free-standing battery powered device which could be positioned anywhere within a room or tent or vehicle.

The source of the volatile composition is preferably disposed in the housing downstream of the first and second electrodes. However, it is also possible for the source to be positioned either between the first and second electrodes, or upstream of the first electrode. These latter arrangements will not be as efficient as the source being disposed downstream of the electrodes, because some of the composition will impinge on the second electrode.

- 11 -

Another alternative arrangement is for a wick impregnated from a source of the volatile composition to form the second electrodes. This simplifies the construction of the device.

5        Whilst an ion wind generating device has some effect alone in repelling insects, i.e. charged air molecules have some effect in repelling insects, the addition of a volatile insect repellent to the ionised air stream significantly enhances this repellent  
10       effect.

The present invention will be further described with reference to the following drawing in which:

Figure 1 shows a sectional drawing of one embodiment of the insect repellent device of the  
15       present invention; and

Figure 2 shows a schematic representation of an ion wind generating device with adjustable electrodes.

Referring to Figure 1, the apparatus 1 comprises a housing 2 of a substantially insulating material, such as glass or plastic. The housing 2 has openings 3  
20       and 4 at either end thereof in communication with the atmosphere.

Protruding into the housing is a first electrode 5, which is electrically conducting and which has a  
25       plurality of pointed tips 6. The electrode is insulated from the housing by suitable means not shown. A second electrically conducting earthed electrode 7 in the form of a screen or mesh is contained within the housing and spaced from electrode  
30       5.

When a dc electrical potential from a source 8 of 5 to 20 kV, depending upon the spacing between electrodes 5 and 7, is applied to the first 5 or  
second 7 electrodes, the potential difference between  
35       these electrodes results in an electrical field 9 in the space 10 between the electrodes. When the electrical field 9 between the first 5 and second 7

- 12 -

electrodes is sufficiently strong, atoms and molecules in the atmosphere in the region near the tips 6 of the electrode 5 become ionized. Ions of opposite polarity to electrode 5 are subsequently repelled from  
5 electrode 5 to the second electrode 7. This flow of ions in an electric field gives rise to an induced air flow termed an "ion wind" and is represented in Figure 1 by the plurality of negatively charged ions.

A slow release source of a volatile composition  
10 11 is positioned downstream of the second electrode. As the ionized air passes over the source 11, molecules of the composition are vaporized by the air stream and become charged by means of the ionized air. The charged molecules of the composition are  
15 illustrated at 12. As shown schematically in Figure 1 the charged molecules 12 of the volatile composition will be attracted to any body 13 in the air due to the configuration of the electric field in close proximity to the body 13. When the volatile source is an insect repellent, the charged molecules will be attracted to  
20 insects. When the volatile source is a fragrance composition, the charged molecules will be attracted to particles, such as dust particles, in the air.

The overall effect of the apparatus of Figure 1  
25 is that an induced ion wind shown by arrow 14 is generated by the device which carries charged particles of the volatile composition.

Furthermore, not only will the charged molecules of the volatile composition be attracted to insects,  
30 or particles in the air, e.g. dust, tobacco particles, allergens or microorganisms, but they will also be attracted to any other surfaces such as bedding, furniture or even human beings which act as grounded targets.

35 Referring to Figure 2, an ion wind generating device was constructed from two plastic tubes 15, 16 measuring 50mm in diameter and 50mm in length. The

- 13 -

first tube 15 has a metal grid 17 covering one end thereof, with the spacings between the wires of the grid being 6mm. The grid was earthed via a suitable wire connection 18. Inside the second tube, 16, was placed the corona electrode 19 which comprised a cross formation comprising aluminium strips holding tufts of stainless steel brushes 20. Each arm of the cross comprised four tufts of brushes, 12mm apart. The electrode 18 was connected to a voltage source via a cable 21. The two plastic tubes 15, 16 were held together with a cylinder of transparent plastics material 22 along the inside of which the two tubes 15, 16 could be slid. In this way the spacing between the earthed grid 17 and the corona electrode 18 could be varied. A voltage of 10kV was applied from a power supply at a current not exceeding 200 $\mu$ A.

Using this device an ion wind airflow of 1.0m/second was achieved by setting the interelectrode distance to 12mm. To obtain an ion wind airflow of 0.5m/second a spacing of 25mm between the electrode was required.

Although the method and apparatus of the present invention in relation to insect repellents and insecticides have been described above mainly in relation to their use against biting insects, such as mosquitoes, other uses could include:

- the delivery of insect repellents and/or insecticides to counter insect pests in storerooms, warehouses, granaries and silos;
- the delivery of insect repellents and/or insecticides to counter insect pests in animal houses, such as stables or animal rearing units; and
- the delivery of insect repellents and/or insecticides to counter pests which attack natural fibres, such as moths.

The advantages of the use of an ion wind to

- 14 -

disperse insect repellents are twofold. First, the device acts as simple fan, so that the volatile repellent substance is dispersed quickly. Secondly, the molecules of the repellent show enhanced targeting. This occurs because the stream of charged ions produced by the device confers a charge to the volatile repellent molecules, thereby producing charged repellent molecules. Contact with the insects themselves, any surfaces the insects touch, including the animal host, is thus enhanced. This may result in a reduction in the number of flights, landings and bites by the insects.

An additional advantage is that less repellent may be required to achieve the same, or even greater effect, because of the enhanced targeting.

The method and apparatus of the present invention when used for dispersing a fragrance composition provide an enhanced distribution of the fragrance composition within a space, as compared to other known methods. As the plume of the fragrance composition carries a unipolar charge, the molecules will interact with any particle in the atmosphere leading to an enhanced clearing of the air because the dust or other particles become indirectly charged and precipitate due to mutual repulsion.

Furthermore, because the molecules of the fragrance composition carry a unipolar charge, these molecules will be attracted to the human body and face, thereby giving an enhanced fragrance effect to a person in the vicinity of the apparatus. Additionally, there will also be a longer lasting fragrance effect due to the result of the deposition of the fragrance composition in the nasal region of a person in the vicinity of the apparatus. These effects are achieved because the molecules of the fragrance composition will seek to disperse as a result of mutual repulsion and will preferentially move towards grounded



- 15 -

surfaces.

The present invention will be further described with reference to the following Examples.

5

#### EXAMPLE 1

The ion wind generating device as described with reference to Figure 2 was used to generate an ion wind airflow of 0.5 m/second with a spacing of 25mm between the electrodes.

10 With an ion wind travelling at 0.5m/second, 1.45g of a fragrance (Lavender & Camomile F537.956 ex Quest) was evaporated over a 24 hour period from a polyether sleeved wick in communication with a source of the fragrance. Sensory tests showed that this amount of evaporation corresponds to an appropriate strength of fragrance to perfume a room approximately 16 metres square. Lower ion wind speeds will give lower levels of perfume delivery and higher ion wind speeds higher levels of perfume delivery.

20

#### EXAMPLE 2

25 The Bioelectrostatics Research Centre of the University of Southampton developed a new protocol to test the use of an ion wind to disperse an insect repellent. A specially constructed test room was used as the test chamber. The door of the room was modified, so that it had a rectangular hole, measuring 30 62.5cm x 62.5cm at the base. Two circular holes measuring 10cm were cut in the door at 141cm and 65cm from the ground. The lower shelf was used to hold an ion wind generating device in position during the test. The ion wind generating device was constructed 35 from a 6mm thick Perspex tube (100mm external diameter) in which the electrodes were housed. The

- 16 -

high voltage electrode was a seven pin brass electrode, whilst the other electrode was a coiled electrode made of brass. The device was otherwise constructed and connected in a manner identical to that described with reference to Figure 1. A small shelf was constructed just below the hole to allow a glass vial containing the repellent compound to be positioned in such a way that evaporating molecules would be picked up by the ion wind stream. The upper hole allowed visual access to the room and acted as an entry point for the mosquitoes. Tubegauz was attached around the holes on the outside of the door to prevent any escapes.

The interior of the room contained a large cage constructed of narrow metal girders (Dexion). This measured 183 x 62.5 x 62.5 cm. This cage was covered with lining paper on four sides. The base of the cage and one end were left open. Masking tape was used to secure the paper to the cage. An opening (21 x 29.5) cm was cut in the top of the paper 16 cm from the closed end. A piece of nylon netting was used to cover this. This opening provided a window through which the odour and warmth of the human test subject could escape and attract the mosquitoes. A foam rubber mattress covered with polythene sheeting was placed inside the cage for the comfort of the human test subject.

The cage was closely aligned with the hole in the bottom of the door, so that the gap was continuous with the cage. The cage was then taped to the floor on the outside with masking tape. An electric heater maintained the room at 24°C (+/- 2°C). The room was otherwise empty.

Thirty minutes before the start of each test, fifty female *Aedes aegypti* mosquitoes were placed into the test room. The mosquitoes had previously been fed only on a 50/50 sugar/water mixture, and had not

- 17 -

received a blood meal. They had not previously been used in a test.

The human subject entered the cage and lay on the mattress, so that the face of the subject was directly below the opening.

Citronella was released by placing it in a small glass vial containing a cotton wick. Each experimental condition was tested for 20 minutes. The human subject was asked to observe the behaviour of the mosquitoes and call out 'land' each time a mosquito landed on the net and 'touch' if this lasted less than a second. Each event was recorded by the experimenter who sat behind the door. Each time a mosquito flew past the subject's field of view it was recorded by the subject with a tally counter. Each twenty minute period was divided into 5 minute periods. The subject was asked every 5 minutes to call out the number of the counter, which was then recorded.

After each test the insects were killed with a fast acting pyrethroid spray. The room was vented for 1 hour before all surfaces in the room were washed with a detergent solution.

### Results

**Table 1**

Mean number of mosquitoes

|                               | touch | landing |
|-------------------------------|-------|---------|
| Human                         | 68    | 109     |
| Human + ion wind              | 5.8   | 17.7    |
| Human + citronella            | 10.5  | 27.9    |
| Human + citronella + ion wind | 3.2   | 9.2     |

- 18 -

These results show that the number of contacts made by the mosquitoes is dramatically reduced by the use of the ion wind alone or together with a mosquito repellent.

5

**CLAIMS:**

1. A method of dispersing a volatile composition which method comprises:  
5           dispersing a volatile composition into an air stream; and generating an ion wind, thus causing the molecules of the volatile composition to become electrically charged.
- 10           2. A method as claimed in claim 1 wherein the volatile composition contains one or more volatile organic compounds.
- 15           3. A method as claimed in claim 1 wherein the volatile composition is an insect repellent, an insecticide or a fragrance composition.
- 20           4. A method as claimed in claim 3 wherein the insect repellent comprises eucalyptus oil, geranium oil, geraniol, pine oil, citronella, neem, thyme oil, thymol, camphor, N-N-dimethyl-m-toluamide, citronelol, citronelal, linalool, carene, myrcene, terpinene, limnolene, cymene, citronellyl formate, geranyl formate, rose oxide, 2-alkyl-N-acetyloxazolidine, N-acetyl-2-alkyl-4,4-dimethyloxazolidine, dipropyl  
25           pyridine-2,5-dicarboxylate, sec-butyl-2-(2-hydroxyethyl)-1-piperidine carboxylate or methylnaphthalene.
- 30           5. A method as claimed in claim 3 wherein the insecticide comprises pyrethrum or a pyrethroid ester insecticide.
- 35           6. A method as claimed in claim 2 wherein the fragrance composition comprises one or more fragrance components selected from diethylphthalate, orange terpenes (limonene), styrallyl acetate ester, Cyclacet, methyl ionone ketone, vanillin, Litsea

- 20 -

Cybeba, 2-phenylethan-1-ol, dipropylene glycol and methyl-p-3°-butyl hydrocinnamyl aldehyde.

5        7. A method as claimed in any one of the preceding claims wherein the volatile composition is dispersed from a slow release formulation.

10       8. A method as claimed in claim 7 wherein the slow release formulation comprises a gel, or a wick or pad fed from a liquid reservoir containing the composition.

15       9. An method as claimed in claim 7 wherein the volatile composition is an insect repellent or insecticide and the slow release formulation is adapted to release the insect repellent or insecticide into the air stream over a period of a least 8 hours.

20       10. An apparatus for dispersing a volatile composition into the atmosphere, which apparatus comprises:

25           a housing of an electrically insulating material which is in communication with the atmosphere outside the housing, the housing containing:  
          (i) a source of a volatile composition; and  
          (ii) means for generating an ion wind to facilitate dispersal of the source of the volatile composition into the  
30           atmosphere and to cause the molecules of the volatile composition to become charged.

35       11. An apparatus as claimed in claim 10 wherein the means for generating an ion wind comprises a first electrode and a second electrode spaced therefrom to define a region there between such that when a dc

- 21 -

electrical potential is applied across the first and second electrodes a electrical field is created in the said region.

5           12. An apparatus as claimed in claim 10 or claim 11 wherein the first electrode has at least one sharp edge or point.

10           13. An apparatus as claimed in any one of claims 10 to 12 wherein the second electrode is a ring electrode, a tubular electrode, a grid electrode, or a combination of one or more thereof.

15           14. An apparatus as claimed in any one of claims 11 to 13 wherein the second electrode is earthed.

20           15. An apparatus as claimed in any one of claims 10 to 14 wherein the source of the volatile composition is provided as a slow release formulation.


            16. An apparatus as claimed in any one of claims 11 to 15 wherein the source of the volatile composition is disposed in the housing downstream of the first and second electrodes.

25           17. An apparatus as claimed in any one of claims 10 to 16 which is adapted to run from an electrical mains supply or light bulb socket.

30           18. An apparatus as claimed in any one of claims 10 to 16 which is adapted to run from a battery or a motor vehicle lighter socket.


35

1/2

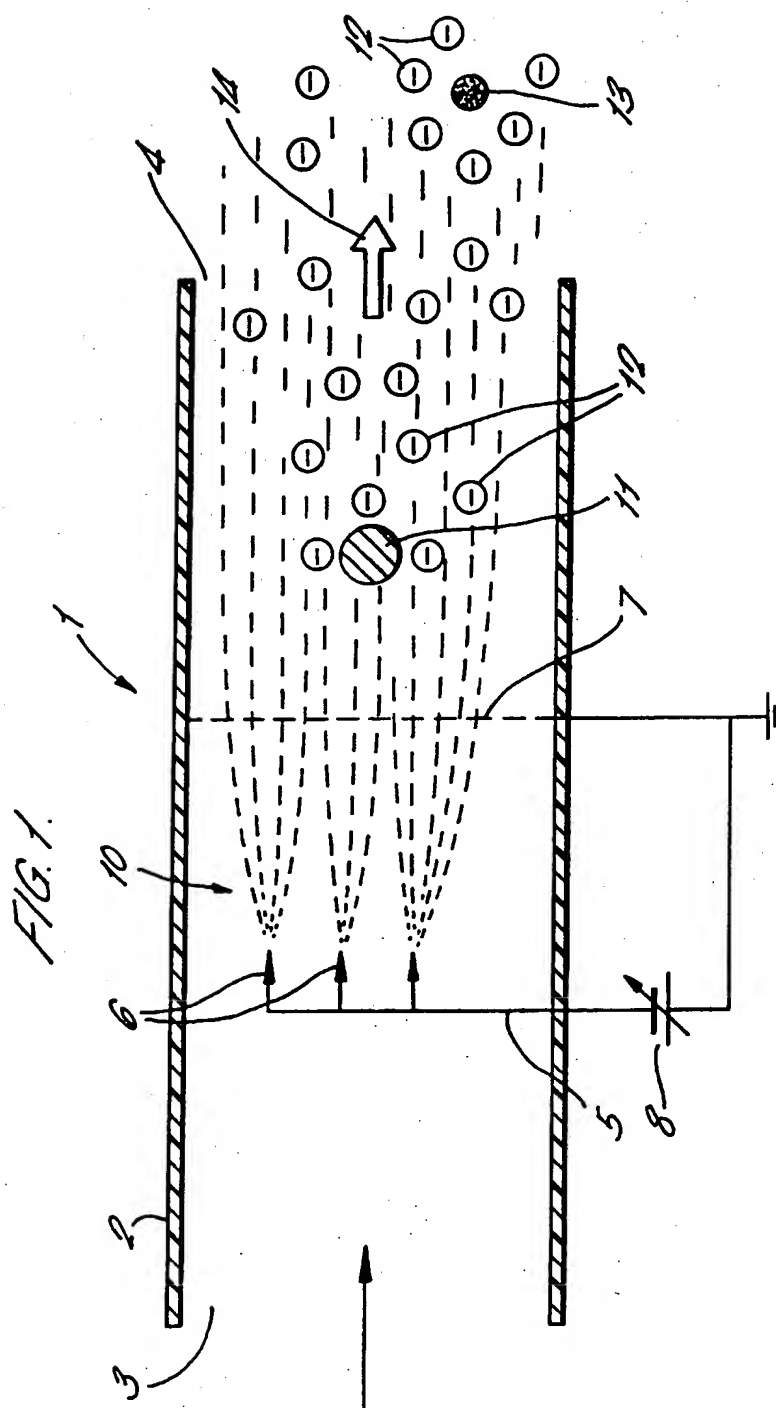



2/2

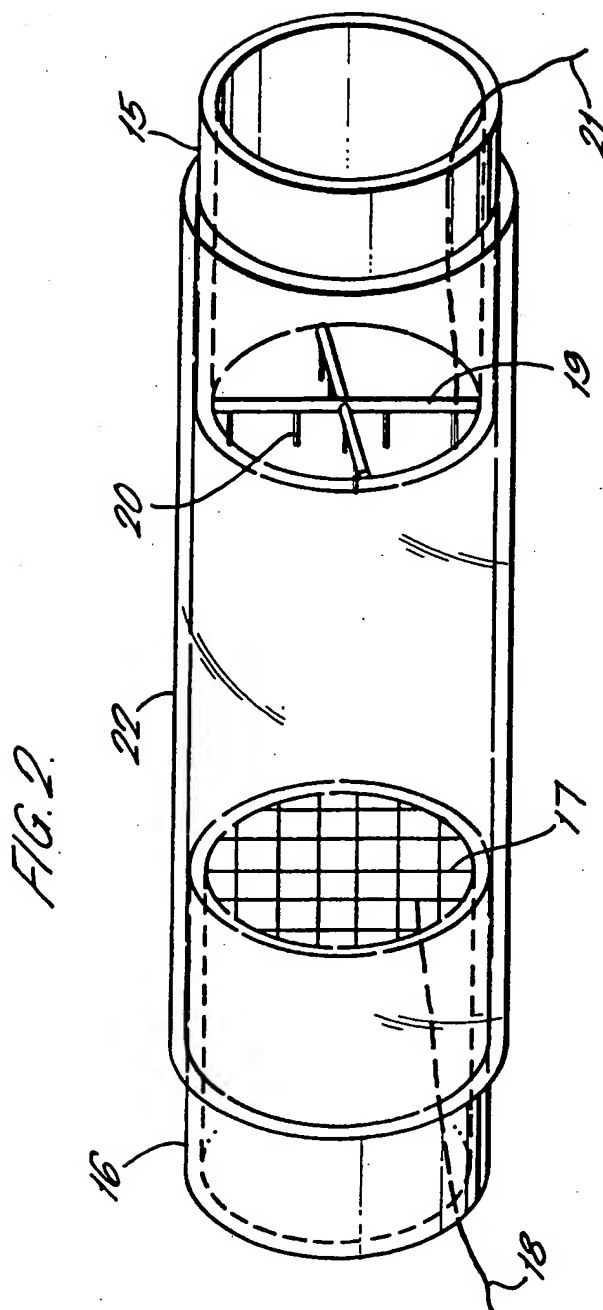

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 99/04312

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 A01M1/20 A61L9/22

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A01M A61L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages                                    | Relevant to claim No. |
|------------|---|-----------------------|
| X          | WO 97 01273 A (UNIV SOUTHAMPTON ;HOWSE<br>PHILIP EDWIN (GB); HUGHES JOHN FARRELL<br>(GB) 16 January 1997 (1997-01-16) | 1-3,<br>10-14         |
| Y          | page 1, line 3 - line 6   | 4-6                   |
| A          | page 2, line 14 -page 5, line 2   | 7-9,<br>15-19         |
|            | claims; figures   |                       |
| Y          | US 5 749 520 A (MARTIN JOHN ET AL)<br>12 May 1998 (1998-05-12)  | 4,6                   |
|            | column 4, line 35 - line 67   |                       |
| Y          | FR 2 067 959 A (DYNACHIM SARL)<br>20 August 1971 (1971-08-20)   | 4,5                   |
|            | page 2, line 16 -page 7, line 19; claims;<br>figures  |                       |
|            | -/-   |                       |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

Date of the actual completion of the international search

17 March 2000

Date of mailing of the international search report

27/03/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3018

Authorized officer

Piriou, J-C

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 99/04312

## C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages  | Relevant to claim No. |
|------------|---|-----------------------|
| A          | WO 96 33539 A (STRAINER LPB AKTIEBOLAG<br>; ANDRZEJ LORETH (SE))<br>24 October 1996 (1996-10-24)<br>claims; figures   | 1,10                  |
| A          | US 5 077 500 A (LORETH ANDRZEJ ET AL)<br>31 December 1991 (1991-12-31)<br>claims; figures   | 1,10                  |
| A          | GB 2 060 076 A (BOSCH GMBH ROBERT)<br>29 April 1981 (1981-04-29)<br>cited in the application<br>claims; figures   | 1,10                  |
| A          | WO 92 15339 A (PELTIER MARK E)<br>17 September 1992 (1992-09-17)<br>cited in the application<br>claims; figures   | 1,10                  |
| A          | DATABASE WPI<br>Section PQ, Week 199423<br>Derwent Publications Ltd., London, GB;<br>Class P34, AN 1994-189966<br>XP002133384<br>& SU 1 803 679 A (BELOV YU I),<br>23 March 1993 (1993-03-23)<br>abstract | 1,10                  |

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter. Appl. No.

PCT/GB 99/04312

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s)   | Publication<br>date  |
|---|---------------------|--|--|
| WO 9701273 A                              | 16-01-1997          | AU 693378 B<br>AU 6236696 A<br>BR 9608889 A<br>CA 2225689 A<br>CN 1193254 A<br>DE 69604585 D<br>DE 69604585 T<br>EP 0835053 A<br>NZ 311123 A | 25-06-1998<br>30-01-1997<br>15-06-1999<br>16-01-1997<br>16-09-1998<br>11-11-1999<br>20-01-2000<br>15-04-1998<br>28-10-1999 |
| US 5749520 A                              | 12-05-1998          | WO 9826809 A   | 25-06-1998   |
| FR 2067959 A                              | 20-08-1971          | NONE   |  |
| WO 9633539 A                              | 24-10-1996          | SE 505053 C<br>AU 5412196 A<br>EP 0821840 A<br>JP 11503870 T<br>SE 9501407 A<br>US 5982102 A   | 16-06-1997<br>07-11-1996<br>04-02-1998<br>30-03-1999<br>19-10-1996<br>09-11-1999   |
| US 5077500 A                              | 31-12-1991          | SE 456204 B<br>AT 70389 T<br>AU 1295788 A<br>DE 3866873 A<br>EP 0343184 A<br>FI 88762 B<br>JP 2502142 T<br>WO 8805972 A                      | 12-09-1988<br>15-12-1991<br>24-08-1988<br>23-01-1992<br>29-11-1989<br>15-03-1993<br>12-07-1990<br>11-08-1988               |
| GB 2060076 A                              | 29-04-1981          | DE 2940397 A<br>JP 56056994 A<br>SE 8006941 A  | 16-04-1981<br>19-05-1981<br>06-04-1981   |
| WO 9215339 A                              | 17-09-1992          | US 5196171 A<br>AU 664699 B<br>AU 1761592 A<br>CA 2105996 A<br>EP 0574547 A<br>JP 6505418 T<br>US 5382410 A                                  | 23-03-1993<br>30-11-1995<br>06-10-1992<br>12-09-1992<br>22-12-1993<br>23-06-1994<br>17-01-1995                             |
| SU 1803679 A                              | 23-03-1993          | NONE   |  |